



Q1DP-xxxM

Q1DP-xxxN3



Q1DP-xxxN1

Hot Sale

### Application:


This series submersible pump is suitable for gardening, drainage, small irrigation system, emptying pond, swimming pool, cellar, reservoir or for some other household water applications.

### Operating Conditions:

- Max. liquid temperature up to +35 °C
- Max. ambient temperature up to +40 °C

### Features:

- The pump can be turned on/off automatically according to water level by float switch.
- The water level of on/off can be set by adjusting the length of cable of float switch.
- Motor is with thermal overload protection.
- Wear resistant shaft and impeller.

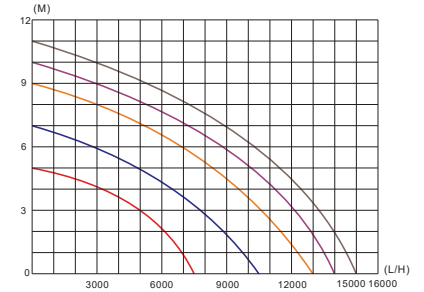

## Technical Data

Model No.	Q1DP-400N1/N3/M	Q1DP-550N1/N3/M	Q1DP-750N1/N3/M	Q1DP-900N1/N3/M	Q1DP-1100N1/N3/M
Rated power:	400 W	550 W	750 W	900 W	1100 W
Max. flow rate:	7500 l/h	10500 l/h	13000 l/h	14000 l/h	15000 l/h
Max. delivery height:	5 m	7 m	9 m	10 m	11 m
Max. submersible depth:	5 m	7 m	7 m	7 m	7 m
Max. grain size:	25 mm	25 mm	25 mm	25 mm	25 mm
Diameter of pipe:	1", 1 1/4", 1 1/2"	1", 1 1/4", 1 1/2"	1", 1 1/4", 1 1/2"	1", 1 1/4", 1 1/2"	1", 1 1/4", 1 1/2"
Power cable:	H05RN-F3G0.75mm <sup>2</sup>	H05RN-F3G1.0mm <sup>2</sup>	H05RN-F3G1.0mm <sup>2</sup>	H05RN-F3G1.0mm <sup>2</sup>	H05RN-F3G1.0mm <sup>2</sup>
Length of power cable:	10 m	10 m	10 m	10 m	10 m
Giftbox size:	22x16x34 cm	22x16x34 cm	22x16x37 cm	22x16x37 cm	22x16x37 cm
Qty / master carton:	4 pcs	4 pcs	4 pcs	4 pcs	4 pcs
Master carton size:	46x34x36 cm	46x34x36 cm	46x34x38.5 cm	46x34x38.5 cm	46x34x38.5 cm
G.W. / N. W.	18.2/16.2 kg	22.3/20.3 kg	22.8/20.6 kg	24/21.8 kg	24.3/22.1 kg